




## Off-the-shelf SKF shaft Co., Ltd

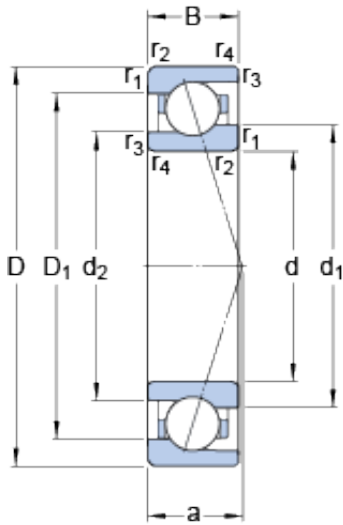

71915 CE/HCP4A Bearing 2D drawings and 3D CAD models

### 75 mm x 105 mm x 16 mm SKF 71915 CE/HCP4A Super Precision Sealed Angular Contact Ball Bearings

Bearing No. 71915 CE/HCP4A

Size	105x75x16 mm
Bore Diameter	105 mm
Outer Diameter	75 mm
Width	16 mm
d	75 mm
D	105 mm
B	16 mm
d <sub>1</sub>	84.3 mm
d <sub>2</sub>	81.8 mm
D <sub>1</sub>	95.52 mm
r <sub>1,2</sub> - min.	1 mm
r <sub>3,4</sub> - min.	0.3 mm
a	20.7 mm
d <sub>a</sub> - min.	79.6 mm
d <sub>b</sub> - min.	77 mm
D <sub>a</sub> - max.	100.4 mm
D <sub>b</sub> - max.	103 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.3 mm
d <sub>n</sub>	86.5 mm
Basic dynamic load rating - C	22.5 kN
Basic static load rating - C <sub>0</sub>	17 kN
Fatigue load limit - P <sub>u</sub>	0.72 kN



## Off-the-shelf SKF shaft Co., Ltd

Limiting speed for grease lubrication	20500 r/min
Limiting speed for oil lubrication	32000 mm/min
Ball - $D_w$	9.525 mm
Ball - $z$	23
$G_{ref}$	4.5 cm <sup>3</sup>
Calculation factor - $f_0$	8.5
Preload class A - $G_A$	120 N
Preload class B - $G_B$	361 N
Preload class C - $G_C$	722 N
Calculation factor - $f$	1.16
Calculation factor - $f$	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.05
Calculation factor - $f_{2C}$	1.09
Calculation factor - $f_{HC}$	1.01
Preload class A	60 N/micron
Preload class B	95 N/micron
Preload class C	131 N/micron
$d_1$	84.3 mm
$d_2$	81.8 mm
$D_1$	95.52 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.3 mm
$d_a$ min.	79.6 mm
$d_b$ min.	77 mm
$D_a$ max.	100.4 mm
$D_b$ max.	103 mm
$r_a$ max.	1 mm
$r_b$ max.	0.3 mm



## Off-the-shelf SKF shaft Co., Ltd

$d_n$	86.5 mm
Basic dynamic load rating C	22.5 kN
Basic static load rating $C_0$	17 kN
Fatigue load limit $P_u$	0.72 kN
Attainable speed for grease lubrication	20500 r/min
Attainable speed for oil-air lubrication	32000 r/min
Ball diameter $D_w$	9.525 mm
Number of balls z	23
Reference grease quantity $G_{ref}$	4.5 cm <sup>3</sup>
Preload class A $G_A$	120 N
Static axial stiffness, preload class A	60 N/ $\mu$ m
Preload class B $G_B$	361 N
Static axial stiffness, preload class B	95 N/ $\mu$ m
Preload class C $G_C$	722 N
Static axial stiffness, preload class C	131 N/ $\mu$ m
Calculation factor f	1.16
Calculation factor $f_1$	1
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.05
Calculation factor $f_{2C}$	1.09
Calculation factor $f_{HC}$	1.01
Calculation factor $f_0$	8.5
Mass bearing	0.29 kg